
Hi Roller

Submittal Sheet

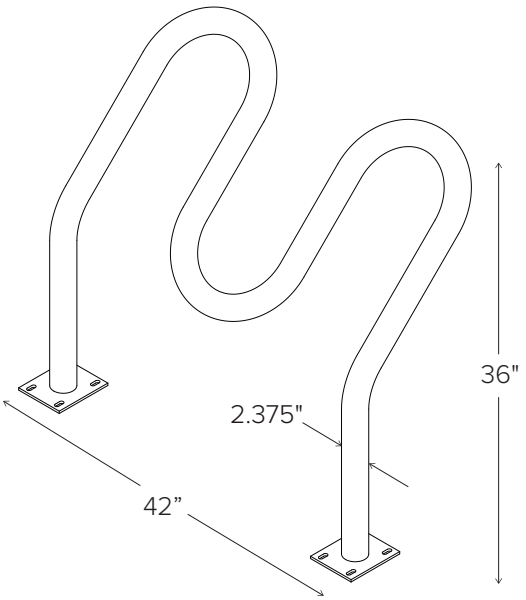

CAPACITY

Hi2H: 4 Bikes
Hi3H: 5 Bikes
Hi4H: 6 Bikes
Hi5H: 7 Bikes

MATERIALS

2.375” OD Schedule 40 Steel Pipe

FINISHES


☐ **Galvanized**
An after fabrication hot dipped galvanized finish is our standard option.

☐ **Powder Coat**
Our powder coat finish assures a high level of adhesion and durability by following these steps:
1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

MOUNT OPTIONS

☐ **Surface**
Foot Mount has two 5”x6”x.25” feet with four anchors per foot. Specify foot mount for this option. Tamper-resistant fasteners available upon request.

☐ **In-Ground**
In-ground mount is embedded into concrete base. Specify in-ground mount for this option

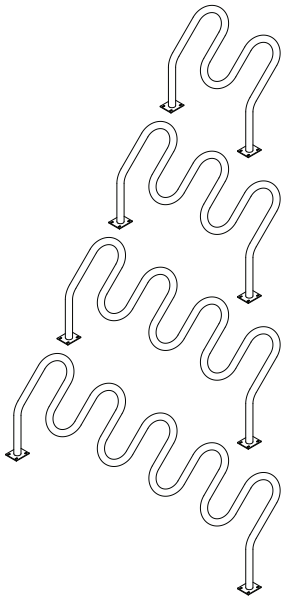


Hi2H - 42”
Parks 4 Bikes

Hi3H - 66”
Parks 5 Bikes

Hi4H - 90”
Parks 6 Bikes

Hi5H - 114”
Parks 7 Bikes

Recommended Footings

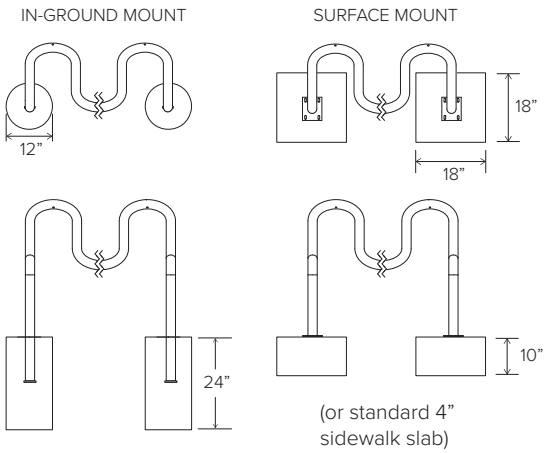

(or standard 4” sidewalk slab)

©2024