
E-Bike Locker Single (D1)

Submittal Sheet

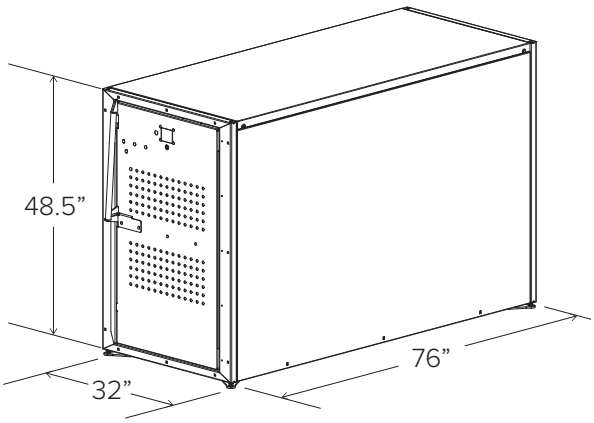

CAPACITY	1 Bike
MATERIALS	**Frame:** 1.50” x 3.00” x 14g tube **Floor:** 18g plate **Sides:** 18g plate **Doors:** 16g plate **Top:** 18g plate The Dero e-charging outlets are IP54 weather resistant, impact resistant, and are UL listed. All Dero e-charging outlets come with an integrated 4-hour timer that helps prevent batteries from overcharging.
FINISHES	**Locker Frame:** Galvanized **Panels and Doors:** Powder coat over G90 electro plated steel
LOAD DATA	40 psf snow, 90 mph wind exposure B, high seismic
SETBACKS	Allow a 60” clearance from door face.
STANDARD	• Outlet with 4-hour timer • Leveling feet • Floor panel • Ventilating window on doors • Graffiti resistant • UV resistant • Gear hook • Door closer
LOCKING OPTION	☐ **Key** ☐ **Padlock**
WINDOW	☐ **Add airport security window to door** 15”W x 28”H x 1/4” UV and grafitti resistant clear polycarbonate

©2026