
Dero **eDecker**

Submittal Sheet

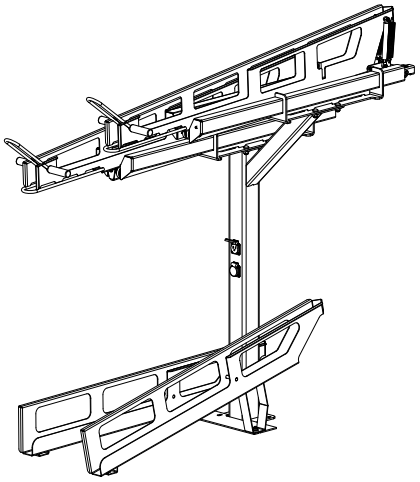

CAPACITY

4 Bikes per unit

MATERIALS

Uprights: 4” 11g square tube
Upright base: 1/4” plate
Cantilevers: 11g plate
Cantilever base: 1/4” plate
Trays: 11g plate

The Dero e-charging outlets are IP54 weather resistant, impact resistant, and are UL listed. All Dero e-charging outlets come with an integrated 4-hour timer that helps prevent batteries from overcharging.

FINISHES

☐ **Galvanized**
An after fabrication hot dipped galvanized finish is our standard option.

☐ **Powder Coat**
Our powder coat finish assures a high level of adhesion and durability by following these steps:
1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat


MOUNT OPTIONS

Surface only
Each upright has one ¼” plate feet that accept 1/2” wedge anchors

CANE STOPS

☐ **Add cane stops (additional cost)**
Available in galvanized or powder coat finish

Cane-detectable lower tray extensions provide improved safety.

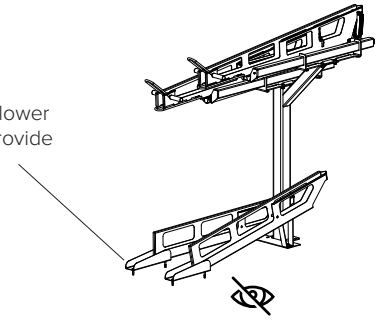

©2026