

DERO A PLAYCORE Company | **Rolling** Rack

Submittal Sheet

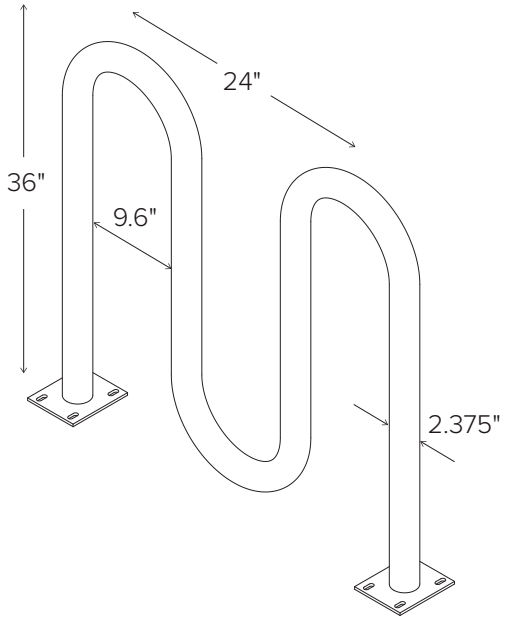


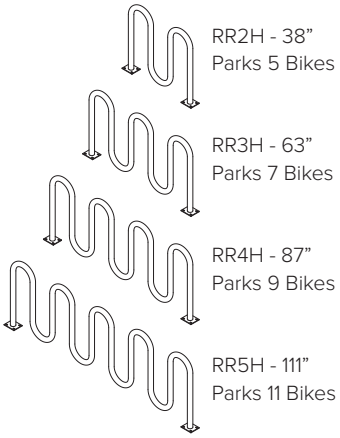

FOOTING DIAGRAMS

IN-GROUND MOUNT

SURFACE MOUNT

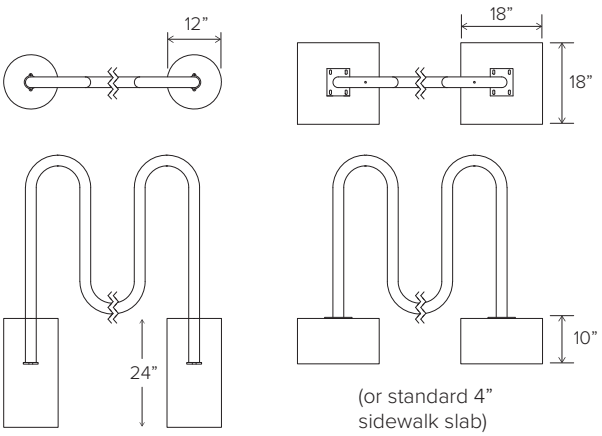

CAPACITY

RR2H: 5 Bikes
RR3H: 7 Bikes
RR4H: 9 Bikes
RR5H: 11 Bikes

MATERIALS

2” schedule 40 pipe (2.375” OD)

FINISHES

☐ **Galvanized**
An after fabrication hot dipped galvanized finish is our standard option.

☐ **Powder Coat**
Our powder coat finish assures a high level of adhesion and durability by following these steps:
1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

☐ **Stainless**
Stainless Steel: 304 grade stainless steel material finished in either a high polished shine or a satin finish.

MOUNT OPTIONS

☐ **Surface**
Foot Mount has two 5” x 6” x .25” feet with four anchors per foot. Specify foot mount for this option. Tamper-resistant fasteners available upon request.

☐ **In-Ground**
In-ground mount is embedded into concrete base. Specify in-ground mount for this option

©2024