
Dero **Decker**

Submittal Sheet

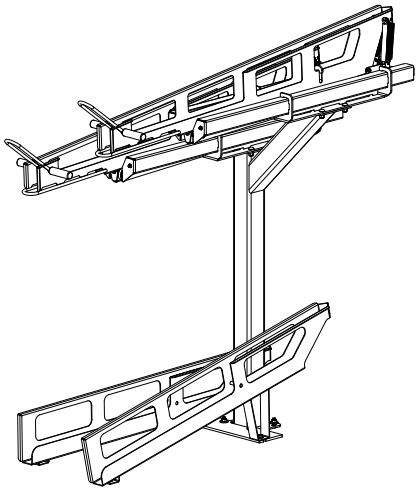

CAPACITY

4 Bikes per unit

MATERIALS

Uprights: 4” 11g square tube
Upright base: 1/4” plate
Cantilevers: 11g plate
Cantilever base: 1/4” plate
Trays: 11g plate

FINISHES

☐ **Galvanized**
An after fabrication hot dipped galvanized finish is our standard option.

☐ **Powder Coat**
Our powder coat finish assures a high level of adhesion and durability by following these steps:
1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

MOUNT OPTIONS

Surface only
Each upright has one 1/4” plate feet that accept 1/2” wedge anchors

E-BIKE CHARGING

☐ **Add Electrical Outlets**
For lower trays only (fat bike trays recommended). Wiring must be performed by a licensed electrician. Racks with electrical outlets must be installed in an area protected from rain and on a GFI circuit. The outlets provided are IP54 weatherproof and UL, CE certified. Consult local electrical codes for more detail.


FAT BIKE TRAYS

☐ **Fat Bike Tray Option (Lower Level Only)**
Fat bike trays accommodate tires up to 5” wide. Standard trays accommodate tires up to 2.25” wide.

CANE STOPS

☐ **Add cane stops**
Available in galvanized or powder coat finish

Cane-detectable lower tray extensions provide improved safety.

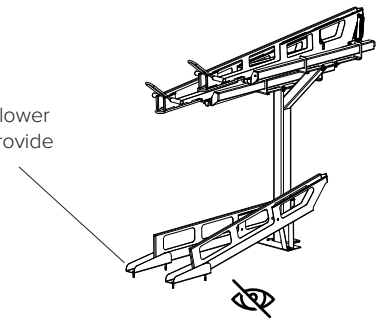

©2024