

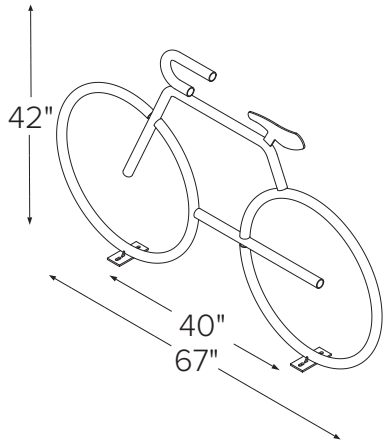


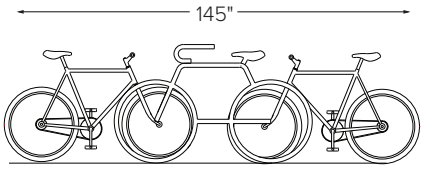

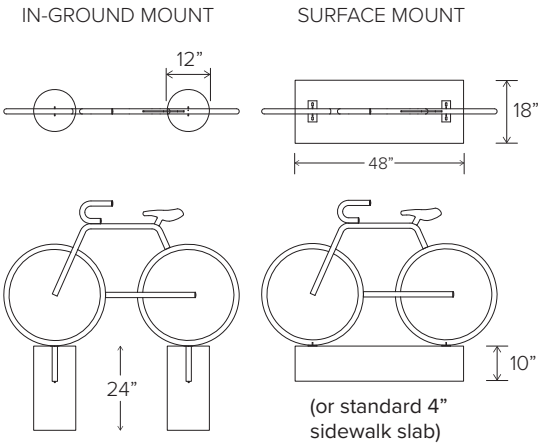

CAPACITY 2-4 Bikes

MATERIALS 1.5” OD 11 Gauge Tube. All open ends are capped to prevent moisture from entering. All welds are MIG welds around entire circumference of joined pieces.

FINISHES

☐ **Galvanized**
An after fabrication hot dipped galvanized finish is our standard option. *Galvanized racks require 3/8” drain holes for the galvanizing process.*

☐ **Powder Coat**
Our powder coat finish assures a high level of adhesion and durability by following these steps:
1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

☐ **Stainless**
Stainless Steel: 304 grade stainless steel material in a satin finish, high polished shine, or powder coat over unpolished stainless.

- ☐ Satin Finish (#4) - Brushed (Our standard)
- ☐ Electropolished - High Polished Shine
- ☐ Powder Coat over Unpolished Stainless

MOUNT OPTIONS

☐ **Surface**
Each rack has two 2.5” x 6” mounting brackets double gusset welded to the “wheels”. The brackets are 40” apart. Each bracket is anchored to the ground with two anchors. Anchors are included with each rack. Tamper-resistant fasteners are available upon request.

☐ **In-Ground**
In-ground mount is embedded into concrete base. Specify in-ground mount for this option

©2025