

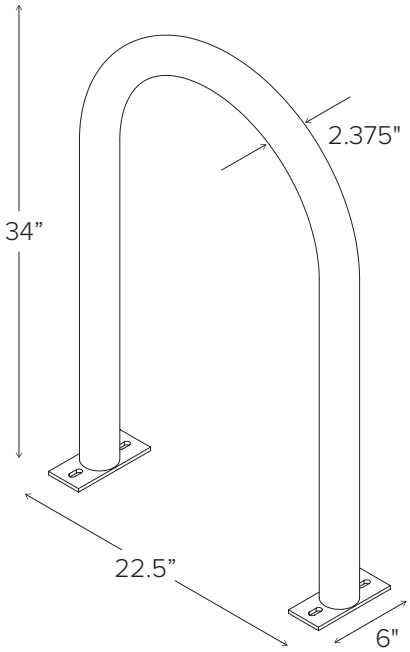


FOOTING DIAGRAMS

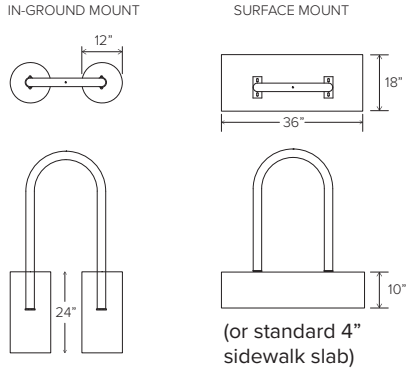



Rail

CAPACITY 2 Bikes

MATERIALS 2” schedule 40 pipe (2.375” OD)

FINISHES

☐ **Galvanized**
An after fabrication hot dipped galvanized finish is our standard option.

☐ **Powder Coat**
Our powder coat finish assures a high level of adhesion and durability by following these steps:
1. Chemically cleaned and treated for corrosion reduction
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

☐ **Stainless**
Stainless Steel: 304 grade stainless steel material in a satin finish, high polished shine, or powder coat over unpolished stainless.

- ☐ Satin Finish (#4) - Brushed (Our standard)
- ☐ Electropolished - High Polished Shine
- ☐ Powder Coat over Unpolished Stainless

MOUNT OPTIONS

☐ **Surface**
Foot Mount has two 2.5” x 6” x .25” feet with two anchors per foot. Specify foot mount for this option. Tamper-resistant fasteners available upon request.

☐ **In-Ground**
In-ground mount is embedded into concrete base. Specify in-ground mount for this option

☐ **Rail**
Rail Mounted Downtown Racks are bolted to two parallel rails which can be left freestanding or anchored to the ground. Rails are heavy duty 3” x 1.4” x 3/16” thick galvanized mounting rails. Specify rail mount for this option.


Rack Angle:



☐ 90 ☐ 45A ☐ 45B ☐ 60A ☐ 60B

OPTIONAL LEAN BAR

☐ **Add Lean Bar**
Lean bar ensures rack meets ADA requirements for cane-detection



©2024