

Ultra Space Saver® Squared


Submittal Sheet

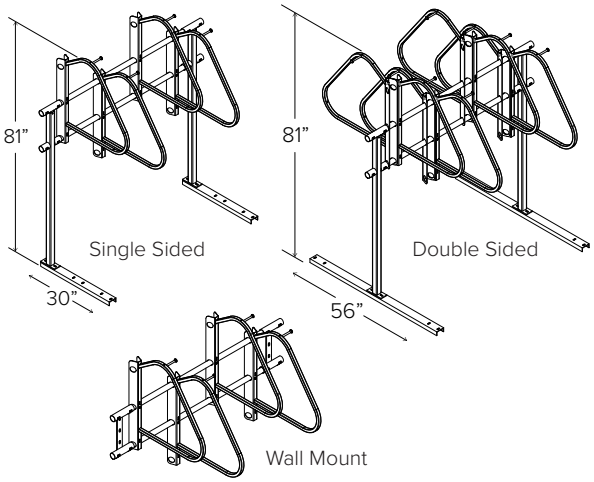

(Examples above show 62” long crossbar sections)



Ultra Space Saver Squared sections vary in length to fit most spaces. Above are common crossbar lengths for arms spaced 16”OC

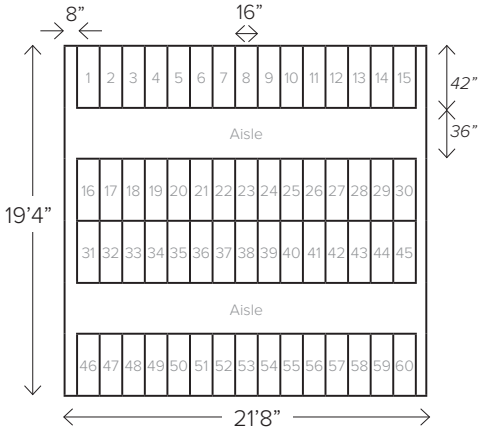

As a general guideline, the above space can fit approximately 60 bicycles.

The Ultra Space Saver Squared parks one bike every 16” with a typical bike extending out 42” from the wall.

CAPACITY

Modular construction
1 bike per arm

MATERIALS

Hanger: 1” square tube with steel slider head with tamperproof locking bolts.
Upright: 2” square tube.
Feet: AISI C3 x 4.1 galvanized steel channel.
Crossbeams: 1.25” sched. 40 galvanized pipe.

FINISHES

☐ **Powder Coat** ***(Feet are galvanized)***
Our powder coat finish assures a high level of adhesion and durability for indoor use by following these steps:
1. Epoxy primer electrostatically applied
2. Final thick TGIC polyester powder coat

MOUNT OPTIONS


☐ **Floor mount**
Ultra Space Saver Squared have steel channel feet (30” for single sided and 56” for double sided units) which must be anchored to the floor.

☐ **Wall mount**
A wall mounted unit which contains special brackets is also available for CMU or solid concrete walls. Cannot be used on sheetrock without additional support.

WHEEL STOPS

☐ **Include wheel stops**


Optional wheel stops are available for both floor and wall mounted racks for an additional cost



CANE STOPS

☐ **Include cane stops**

Optional cane-detectable stops are available for both floor and wall mounted racks for an additional cost



©2024